

LockOne Entry

TE20•xx Technical Manual




CHARACTERISTICS

The integrated battery compartment in the bottom of the LockOne entry unit opens by moving a slider. ABS or metal, matte black or bright chrome finish available. Cable length approx. 30 cm. All LockOne series keypads feature built-in graphic LCD to drive users through keypad operations.

DIMENSIONS / MOUNTING INSTRUCTION

The diameter of the cable hole should be minimum 9 mm, maximum 12 mm. The hole must be de-burred well to avoid damage to the cable.

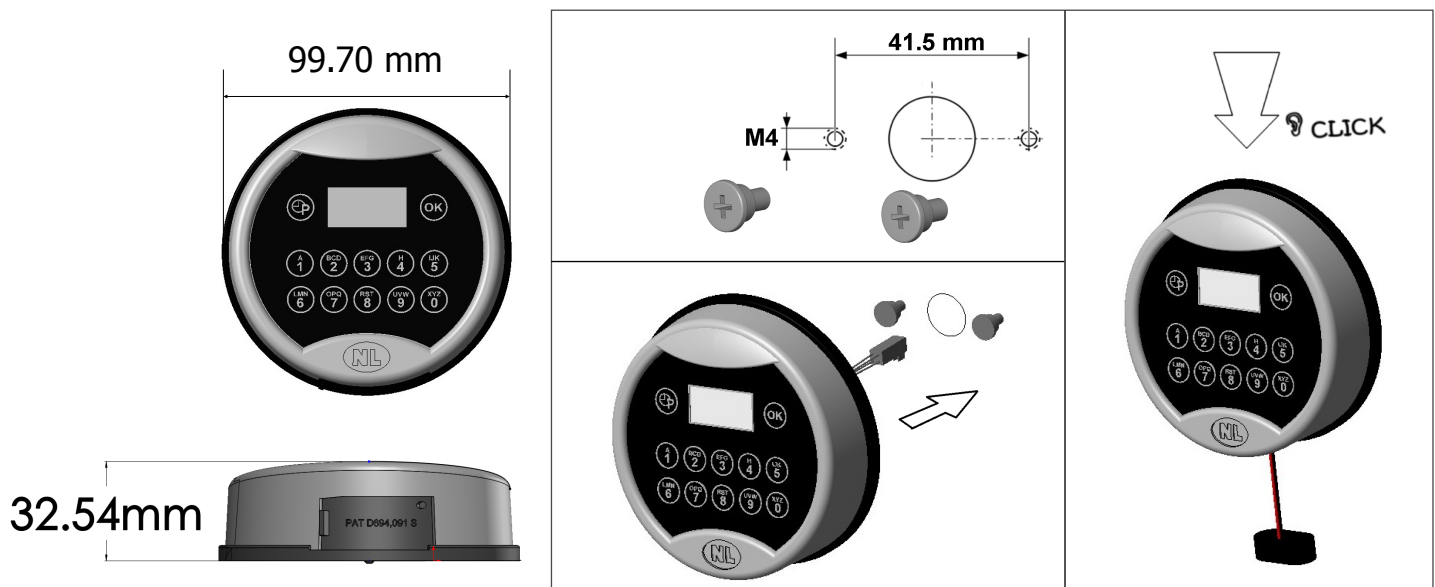

Affix the two mounting adapter (M4). Route the cable through the cable hole on the safe and slide the unit on the mounting adapters. The back of the unit must touch the door surface. Control cable routing, then push the unit down until it snaps on positively.

The LockOne entry unit can now not be removed!

The battery compartment is located at the bottom of the entry unit. Connect one (1) battery to the battery clip. Only use 9V-ALKALINE batteries from brand name manufacturers like DURACELL™.

A series of signals indicates that the battery is weak and must be replaced.