

# QuickTouch

## QT20•xx Technical Manual




### CHARACTERISTICS

The integrated battery compartment in the bottom of the QuickTouch entry unit opens by pulling down. ABS matte black or bright chrome finish available. Cable length approx. 30 cm. All QuickTouch series keypads feature built-in LED lights for use in dark room conditions.

### DIMENSIONS / MOUNTING INSTRUCTION

The diameter of the cable hole should be minimum 9 mm, maximum 12 mm. The hole must be de-burred well to avoid damage to the cable.

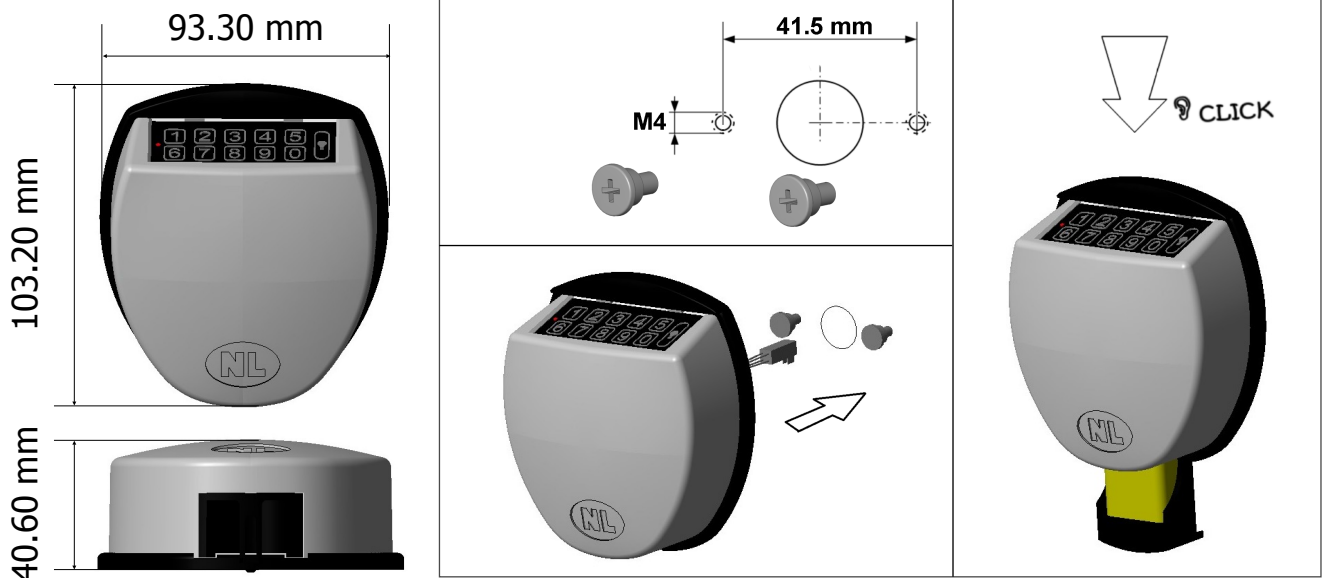

Affix the two mounting adapter (M4). Route the cable through the cable hole on the safe and slide the unit on the mounting adapters. The back of the unit must touch the door surface. Control cable routing, then push the unit down until it snaps on positively.

### **The QuickTouch entry unit can now not be removed!**

The battery compartment is located at the bottom of the entry unit. Pull down the compartment to replace the battery. Only use 9V-ALKALINE batteries from brand name manufacturers like DURACELL™.

A series of signals indicates that the battery is weak and must be replaced.