Universal RotoBolt

UR20•10

CHARACTERISTICS

The Universal lock with direct opening activation is the perfect solution for securing all those safes with internal electronics such as: smart safes, cash recyclers, money-handling equipments, automatic deposit safes, rental lockers, automatic teller machines and so on. The lock can be connected directly to the safe electronics so that lock opening and monitoring can be managed through the same electronic hardware and software that controls safe operations and through the same user interface

The lock can be mounted in all four mounting directions. When opening signal is ON (see electrical specifications below), the blocking feature is released for the duration of the opening signal and the boltwork can be moved into OPEN position by pushing the bolt inside the lock case. When moving the boltwork into LOCKED position the Universal lock automatically secures.

An optional bolt switch can be mounted on the lock board and bolt status signal (bolt close —> signal close) is available on the 4-wires connector

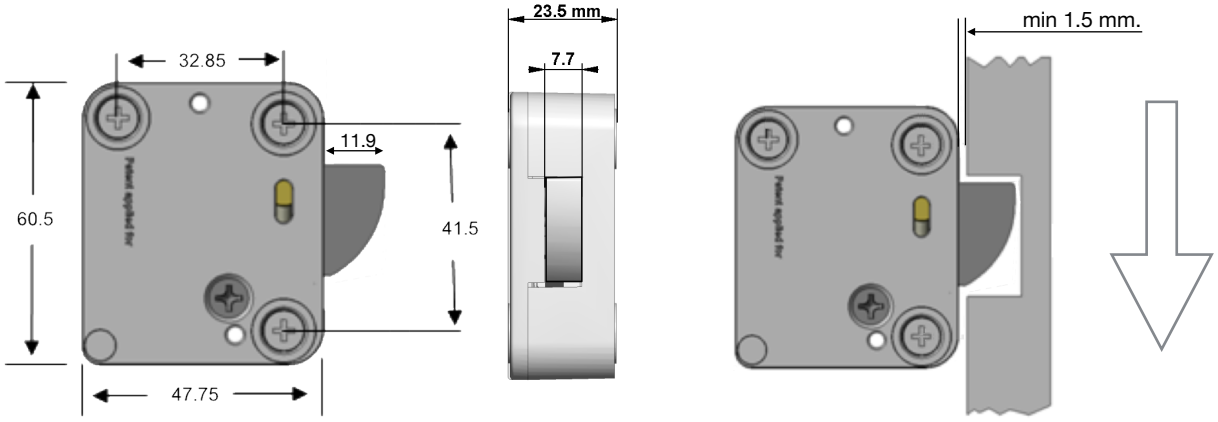

ELECTRICAL SPECIFICATIONS and CONNECTION

Motor	Open signal voltage	Open signal current	Max. activation time
Mabuchi FC130SA-14150	3 VDC	450-700 mA	10 sec

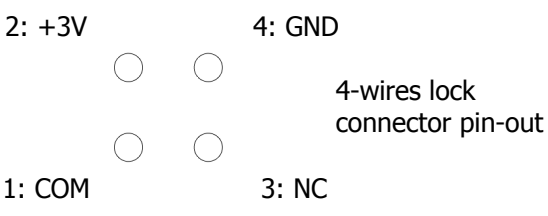

4-wires lock connector pin-out

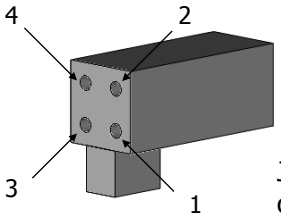

JWT A2542H02-2x2P or equivalent

© 2017 Lock Technology